
Inductive Sensors

BES 516-325-SA96-G-S4-C
Order Code: BES035R

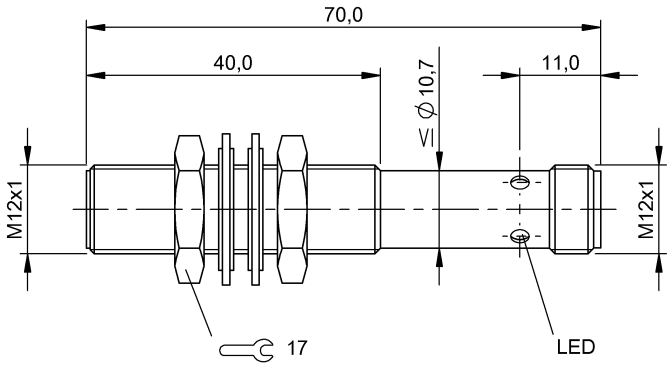

Basic features

Additional features	Weld immune
Approval/Conformity	cULus CE EAC WEEE
Base type deviation	Ceramic coating
Basic standard	IEC 60947-5-2
Principle of operation	Inductive sensor

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	1 µF
Min. operating current Im	0 mA
No-load current Io max., damped	12 mA
No-load current Io max., undamped	4 mA
Operating voltage Ub	10...30 VDC
Output resistance Ra	33.0 kOhm + D
Protection class	II
Rated insulation voltage Ui	250 V AC
Rated operating current Ie	200 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	10 ms
Residual current Ir max.	10 µA
Ripple max. (% of Ue)	15 %
Switching frequency	1000 Hz
Utilization category	DC -13
Voltage drop static max.	2.5 V

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g_n, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP68

Functional safety

MTTF (40 °C)	330 a

Interface

Switching output	PNP normally open (NO)

BES 516-325-SA96-G-S4-C
Order Code: BES035R

Material

Housing material	Brass, nickel-plated
Material sensing surface	ceramic coated

Mechanical data

Dimension	Ø 12 x 70 mm
Installation	for flush mounting
Mounting length	40.00 mm
Size	M12x1
Tightening torque	10 Nm

Range/Distance


Assured operating distance Sa	3 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	4 mm
Real switching distance sr	4 mm
Repeat accuracy max. (% of Sr)	5.0 %
Switching distance marking	■■
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Remarks

For flush mounting: see installation instructions for inductive sensors with extended switching distance 825357. Sn: reduced by the coating thickness of 0.2 mm.
The sensor is functional again after the overload has been eliminated.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams (Schematic)

