## Emparro 40-3x360-500/24 C


Art.No.: 87693
Weight: 2,732 kg
Country of origin: CZ
Model designation: Emparro 40-3x360-500/24 C

INPUT: 3× 324...572 V AC / 480...745 V DC
OUTPUT: 24...28 V DC
Current: 40 A
Varnished board

[Link to Product]

### Illustration



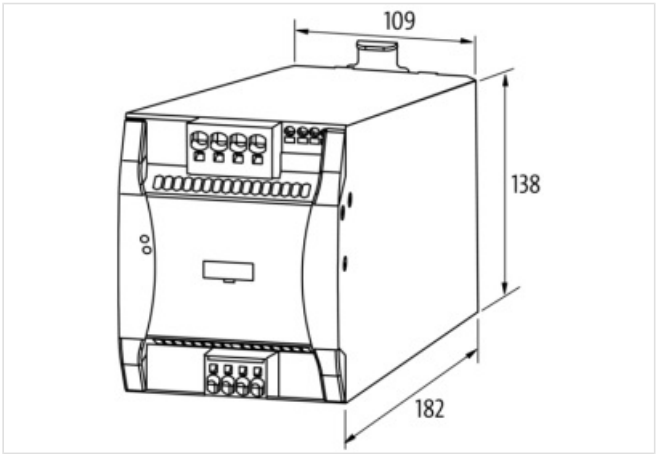


Product may differ from Image

### Commercial data

| | |
|---|---|
| URL Webshop | https://shop.murrelektronik.com/87693 |
| GTIN | 4048879538732 |
| EU-Customs tariff number | 85044095 |
| US-Customs tariff number | 8504409580 |
| ECLASS-6.0 | 27049002 |
| ECLASS-6.1 | 27049002 |
| ECLASS-7.0 | 27049002 |
| ECLASS-7.1 | 27049002 |
| ECLASS-8.0 | 27049002 |
| ECLASS-8.1 | 27049002 |
| ECLASS-9.0 | 27040701 |
| ECLASS-9.1 | 27040701 |
| ECLASS-10.0.1 | 27040701 |
| ECLASS-10.1 | 27040701 |
| ECLASS-11.0 | 27040701 |
| ECLASS-11.1 | 27040701 |
| ECLASS-12.0 | 27040701 |
| ECLASS-13.0 | 27040701 |
| ECLASS-14.0 | 27040701 |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

| | |
|---|---|
| ETIM-5.0 | EC002540 |
| ETIM-6.0 | EC002540 |
| ETIM-7.0 | EC002540 |
| ETIM-8.0 | EC002540 |
| ETIM-9.0 | EC002540 |
| ETIM-10.0 | EC002540 |
| customs tariff number | 85044095 |
| EAN | 4048879538732 |
| Packaging unit | 1 |
| **Electrical data** | |
| Parallel connection | Yes |
| Number of devices parallel connection max. | 3 |
| Series connection | Yes |
| Number of devices series connection max. | 3 |
| **Electrical data \| Supply** | |
| Protective measure | SELV |
| Power frequency | 50 ... 60 Hz |
| **Electrical data \| Input** | |
| Phase number input | 3 |
| Input voltage AC min. | 324 V |
| Input voltage AC max. | 572 V |
| Nominal input voltage AC | 3 × 360 V … 500 V |
| Input voltage DC min. | 480 V |
| Input voltage DC max. | 745 V |
| Nominal current AC | 3 × 2.3 A @ 360 V,1.6 A @ 500 V |
| Inrush current max. | 14 A @ 500 V |
| Power factor | 3× 500 V AC |
| Efficiency | 93.7 % @ 3× 400 V AC 93.5 % @ 3× 480 V AC |
| Characteristic back-up fuse | Inertia |
| Fuse protection primary side internal | 6.3 A |
| **Electrical data \| Output** | |
| Output voltage adjustable | Yes |
| Output voltage DC | 24 V |
| Output voltage DC min. | 24 V |
| Output voltage DC max. | 28 V |
| Output current | 48 A |
| Mains failure bridging min. | 40 ms @ 3× 500 V AC |
| Power Boost | 150 % |
| Duration Power Boost min. | 5 s |
| Spikes (s-s) max. | 90 mV |
| Ripple effective max. | 20 mV |
| **Device protection \| Electrical** | |
| Degree of protection (EN IEC 60529) | IP20 |
| Overload protection output | Yes |
| Short-circuit protection output | Yes |
| **Mechanical data \| Mounting data** | |
| Height | 138 mm |
| Width | 109 mm |
| Depth | 182 mm |
| Mounting method | geschnappt |
| Suitable for mounting type | Mounting rail TH35, (EN 60715) |
| **Environmental characteristics \| Electromagnetic compatibility** | |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

| | |
|---|---|
| Interference emission | EN IEC 55011, IEC 61000-3-2 |
| **Environmental characteristics \| Climatic** | |
| Operating temperature min. | -40 °C |
| Operating temperature max. | 70 °C |
| Derating | 45 °C |
| Ambient temperature (storage, transport) | -40 °C … 85 °C |
| Relative humidity (operation) | 5 % … 95 % |
| Additional condition relative humidity | no condensation |
| **Conformity** | |
| Product standard | EN IEC 61010-2-201, EN 61204-3 |
| **Approvals** | |
| SEMI F47 | compliant |
| **Connection type 3-3** | |
| Connection type 1 | Alarm / Pro-Diag |
| Connection type 2 | Input |
| Connection type 3 | Input / Output |
| Family construction form | terminal |
| No. of poles | 4 |
| Gender | female |
| Color contact carrier | green |
| Connection | Spring clamp terminals FK |
| PIN 1 | 13 |
| PIN 2 | 14 |
| PIN 3 | 23 |
| PIN 4 | 24 |
| Family construction form | terminal |
| No. of poles | 4 |
| Gender | female |
| Color contact carrier | green |
| Connection | Spring clamp terminals FK |
| PIN 1 | PE |
| PIN 2 | L 1 |
| PIN 3 | L 2 |
| PIN 4 | L 3 |
| Family construction form | terminal |
| No. of poles | 4 |
| Gender | female |
| Color contact carrier | green |
| Connection | Spring clamp terminals FK |
| PIN 1 | - |
| PIN 2 | - |
| PIN 3 | + |
| PIN 4 | + |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14