MICO67 electronic circuit protection, 4-channels, 2A

IN: 24 V DC OUT: 24 V DC / 2 A CL2 / Expandable


Art.No.: 9000-41014-0200067
Weight: 0,153 kg
Country of origin: DE
Model designation: Mico67-4.2-CL2


MICO67 4.2 CL2
4 × M12, A-coded NEC CL2, (2 A)
Voltage IN and transmission via M12, L-coded (16 A)
24 V/16 A
24 V/2 A
LED port diagnostic
Limitation of the 4 voltage taps to 2 A (M12, A-coded)

Link to Product

Illustration



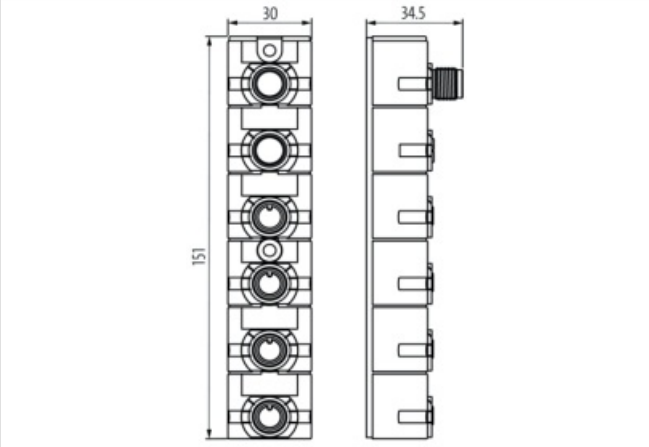

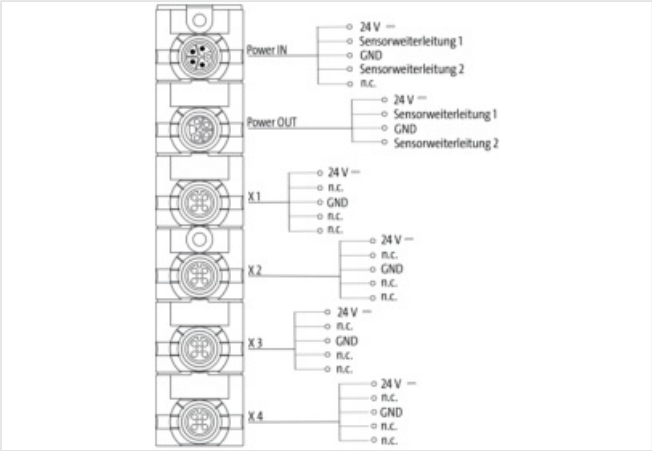

Product may differ from Image

Commercial data

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-13

URL Webshop	https://shop.murrelektronik.com/9000-41014-0200067
GTIN	4048879852272
EU-Customs tariff number	85363010
US-Customs tariff number	8536308000
ECLASS-6.0	27049002
ECLASS-6.1	27049002
ECLASS-7.0	27049002
ECLASS-7.1	27049002
ECLASS-8.0	27049002
ECLASS-8.1	27049002
ECLASS-9.0	27040701
ECLASS-10.0.1	27040701
ECLASS-10.1	27040701
ECLASS-11.0	27040701
ECLASS-11.1	27040701
ECLASS-12.0	27040701
ECLASS-13.0	27040701
ECLASS-14.0	27040701
ETIM-7.0	EC001440
ETIM-8.0	EC001440
ETIM-9.0	EC001440
ETIM-10.0	EC001440
customs tariff number	85363010
EAN	4048879852272
Packaging unit	1
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP67, IP65
Environmental characteristics | Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	45 °C
Ambient temperature (storage, transport)	-25 °C … 70 °C

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-13