CUBE67 I/O COMPACT MODULE

16 multifunction channels


Art.No.: 56640
Weight: 0,210 kg
Country of origin: CZ
Model designation: Cube67 DIO16 C 8xM12 1,6A


Compact module
DIO16 - 1.6 A (C) - 8× M12
short-circuit and overload protected
Digital inputs/outputs (multifunctional)
Connection cables are in the online shop under "Connection Technology".
Housing fully potted.

Link to Product

Illustration



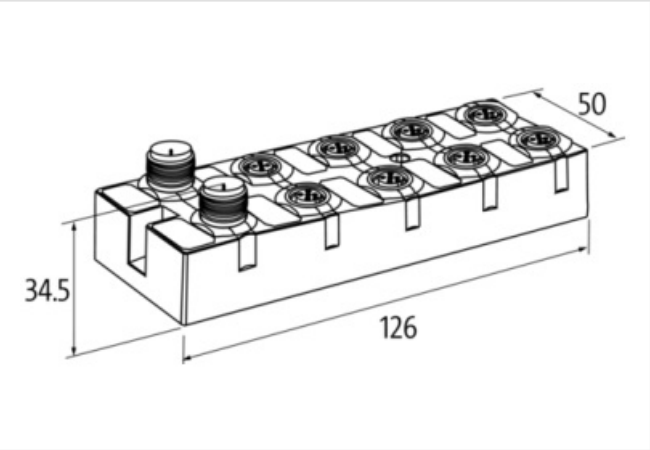

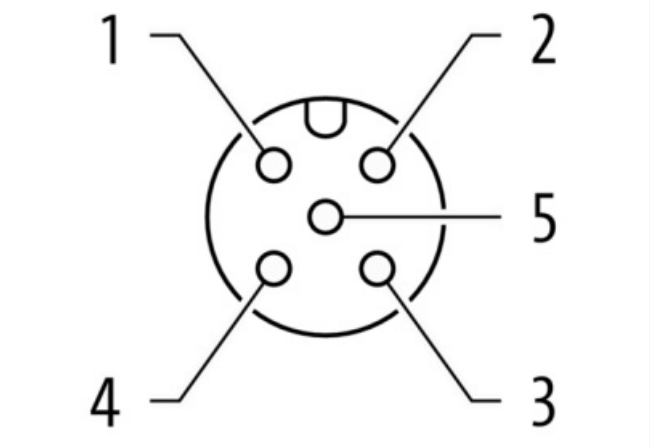

Product may differ from Image

Commercial data

URL Webshop	https://shop.murrelektronik.com/56640

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

GTIN	4048879048439
EU-Customs tariff number	85389099
US-Customs tariff number	8538908180
ECLASS-6.0	27242604
ECLASS-6.1	27242604
ECLASS-7.0	27242604
ECLASS-7.1	27242604
ECLASS-8.0	27242604
ECLASS-8.1	27242604
ECLASS-9.0	27242604
ECLASS-9.1	27242604
ECLASS-10.0.1	27242604
ECLASS-10.1	27242604
ECLASS-11.0	27242604
ECLASS-11.1	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604
ECLASS-14.0	27242604
ETIM-5.0	EC001599
ETIM-6.0	EC001599
ETIM-7.0	EC001599
ETIM-8.0	EC001599
ETIM-9.0	EC001599
ETIM-10.0	EC001599
customs tariff number	85389099
EAN	4048879048439
Packaging unit	1
Electrical data	
Terminating resistor	integrated
Electrical data | Supply	
Norm operating voltage	IEC/EN 61131-2
Operating voltage US DC	24 V
Total current US max.	4 A
Operating voltage UA DC	24 V
Total current UA max.	4 A
Total current UA PowerIN max.	4 A
Current consumption max.	50 mA
Electrical data | Input	
Sensor current US per input max.	0.2 A
Short-circuit protected	Yes
Overload resistant	Yes
filter time	1 ms
Type input	for 3-wire sensors or mechanical switches, PNP
Electrical data | Output	
Output current per pin max.	1.6 A
Overload resistant	Yes
Short-circuit protected	Yes
Lamp load	30 W
Diagnostics	
Actuator warning	per channel via LED and BUS
Short circuit diagnosis	Yes
Overload diagnosis	Yes

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

Diagnostic	No voltage, Under voltage
Diagnostic via BUS	per module and channel
Diagnostic via LED	per module and channel
LED display	Ethernet connection/data traffic
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP67
Mechanical data | Mounting data	
Height	126 mm
Width	50 mm
Depth	34.5 mm
Suitable for mounting type	2-hole screw mounting
Environmental characteristics | Climatic	
Operating temperature min.	0 °C
Operating temperature max.	55 °C
Ambient temperature (storage, transport)	-20 °C … 75 °C
Connection type 3-3	
Connection type 1	0-7
Connection type 2	Bus In
Connection type 3	Power In
Family construction form	M12
No. of poles	5
Coding	A
Gender	female
Color contact carrier	black
PIN 1	24 V DC (US)
PIN 2	DI / DO / Diag
PIN 3	0 V
PIN 4	DI / DO
PIN 5	PE
Family construction form	M12
No. of poles	6
Coding	A
Gender	male
Color contact carrier	black
PIN 1	24 V DC (UA)
PIN 2	24 V DC (US)
PIN 3	0 V
PIN 4	Bus internal
PIN 5	Bus internal
PIN 6	0 V
Family construction form	M12
No. of poles	6
Coding	A
Gender	male
Color contact carrier	black
PIN 1	24 V DC (UA)
PIN 6	0 V

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14