10 Port unmanaged Gigabit Switch 4 PoE 2 SFP Ports IP20 metal


Art.No.: 58194
Weight: 0,700 kg
Country of origin: TW
Model designation: TREE 10TX 4PoE 2SFP GE

10 Port Unmanaged IP20 PoE Gigabit Switch Metal
24 V power supply
4 PoE ports – 2 SFP ports

[Link to Product]

Illustration



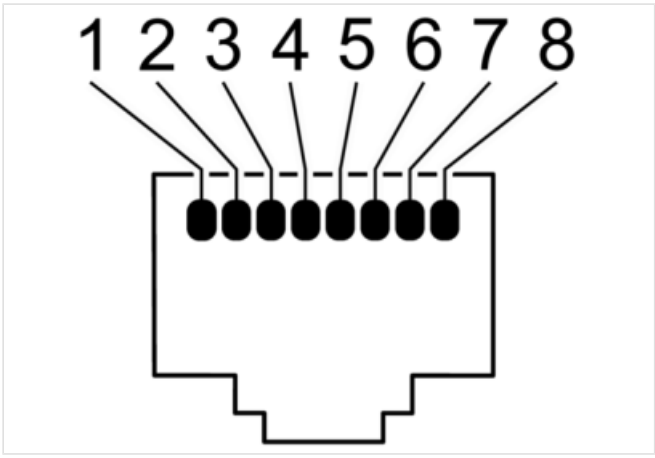

Product may differ from Image

Commercial data

URL Webshop	https://shop.murrelektronik.com/58194
GTIN	4048879844215
EU-Customs tariff number	85176200
US-Customs tariff number	8517620090
ECLASS-6.1	19170106
ECLASS-7.0	19170106
ECLASS-7.1	19170106
ECLASS-8.0	19170106
ECLASS-8.1	19170106
ECLASS-9.0	19170106
ECLASS-9.1	19170106
ECLASS-10.0.1	19170402
ECLASS-10.1	19170402
ECLASS-11.0	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ECLASS-13.0	19170402
ECLASS-14.0	19170402
ETIM-9.0	EC000734
ETIM-10.0	EC000734

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15

customs tariff number	85176200
EAN	4048879844215
Packaging unit	1
Electrical data | Supply	
Operating voltage DC min.	12 V
Operating voltage DC max.	57 V
PoE voltage amplifier	Yes
Industrial Communication	
Data transmission rate max.	1000 Mbit/s
Industrial communication | Ethernet functionality	
VLAN unmanaged (IEEE 802.1Q)	Yes
Switch type	unmanaged
duplex	Full duplex
Auto-negotiation	Yes
Auto-crossover	Yes
Diagnostics	
Alarm contact	Yes
Diagnostic	No voltage
LED display	Ethernet connection/data traffic
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP20
Mechanical data | Material data	
housing	Metal
Color housing	black
Mechanical data | Mounting data	
Height	145 mm
Width	57.8 mm
Depth	113 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Environmental characteristics | Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	70 °C
Ambient temperature (storage, transport)	-40 °C … 85 °C
Connection type 3-3	
Connection type 1	8
Connection type 2	10
Connection type 3	X1
Family construction form	RJ45
No. of poles	8
Gender	female
Color contact carrier	black
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15

Family construction form	POF SC-RJ
No. of poles	2
Gender	female
Color contact carrier	black
PIN 1	RD
PIN 2	TD
Family construction form	terminal
No. of poles	7
Gender	male
Color contact carrier	green
Connection	Plug-in terminals RK
PIN 1	FE
PIN 2	V 1 -
PIN 3	V 1 +
PIN 4	Relay (NO)
PIN 5	Relay (NO)
PIN 6	V 2 -
PIN 7	V 2 +

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15