CUBE67 I/O EXTENSION MODULE, VA


4 analog inputs


Art.No.: 5670150
Weight: 0,150 kg
Country of origin: DE
Model designation: CUBE67 AI4 E 4XM12 (U) VA

Expansion module
AI4 - (E) 4× M12 (U)
Voltage
Metal parts: Stainless steel
Connection cables are in the online shop under "Connection Technology".
Housing fully potted.

Link to Product

Illustration

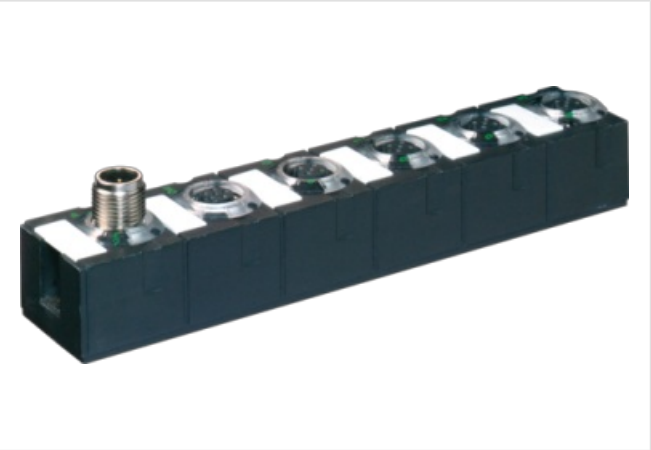

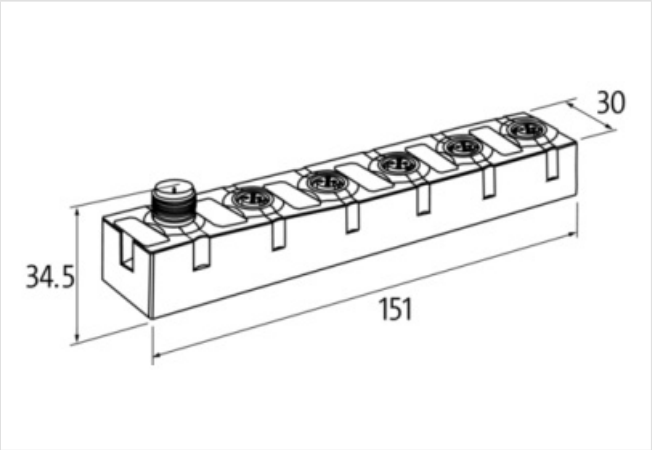

Product may differ from Image

Commercial data

URL Webshop	https://shop.murrelektronik.com/5670150
GTIN	4048879044837
EU-Customs tariff number	85389099
US-Customs tariff number	8538908180
ECLASS-6.0	27242601
ECLASS-7.0	27242601
ECLASS-8.0	27242601
ECLASS-9.0	27242601
ETIM-5.0	EC001596
ETIM-6.0	EC001596
ETIM-7.0	EC001596
ETIM-8.0	EC001596
ETIM-9.0	EC001596
ETIM-10.0	EC001596
customs tariff number	85389099
EAN	4048879044837

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

Packaging unit	1
Electrical data | Supply	
Norm operating voltage	IEC/EN 61131-2
Operating voltage US DC	24 V
Total current US max.	4 A
Total current UA max.	4 A
Current consumption max.	50 mA
Electrical data | Input	
Sensor current US per input max.	0,2 A
Short-circuit protected	Yes
Overload resistant	Yes
Input resistor	1.000 kΩ
Conversion time analog input per channel	2 ms
Industrial communication | Bus data	
Internal system connection	Yes
Diagnostics	
Actuator warning	per channel via LED and BUS
Short circuit diagnosis	Yes
Overload diagnosis	Yes
Diagnostic	No voltage, Under voltage
Diagnostic via BUS	per module and channel
Diagnostic via LED	per module and channel
LED display	Ethernet connection/data traffic
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP67
Mechanical data | Mounting data	
Height	151 mm
Width	30 mm
Depth	34,5 mm
Suitable for mounting type	2-hole screw mounting
Environmental characteristics | Climatic	
Operating temperature min.	0 °C
Operating temperature max.	55 °C
Ambient temperature (storage, transport)	-20 °C … 75 °C

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14