## Cube67 I/O Cable-Module, I/O Extension Module

DIO16, Open-End, 0,5m


Art.No.: 56662
Weight: 0,220 kg
Country of origin: CZ
Model designation: Cube67 DIO16 E Cable 0,5A

Expansion module
DIO16 - 0.5 A (E) 0.5 m (open cable)
With open ended wires
Digital inputs/outputs (multifunctional)
Connection cables are in the online shop under "Connection Technology".
Housing fully potted.

**Link to Product**

### Illustration



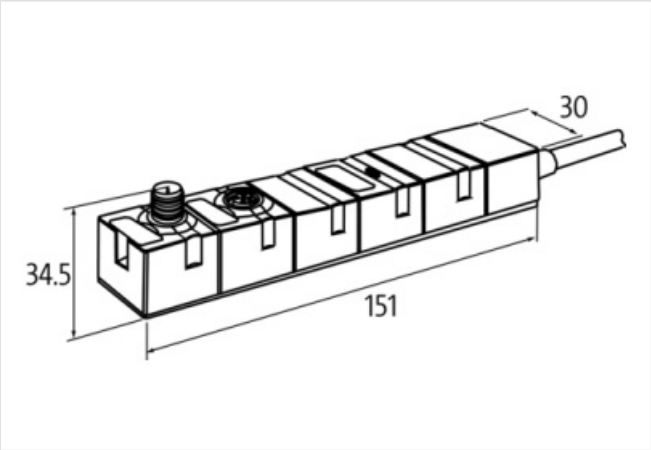


Product may differ from Image

### Commercial data

| | |
|---|---|
| URL Webshop | https://shop.murrelektronik.com/56662 |
| GTIN | 4048879048330 |
| EU-Customs tariff number | 85444290 |
| US-Customs tariff number | 8544429090 |
| ECLASS-6.0 | 27242604 |
| ECLASS-6.1 | 27242604 |
| ECLASS-7.0 | 27242604 |
| ECLASS-7.1 | 27242604 |
| ECLASS-8.0 | 27242604 |
| ECLASS-8.1 | 27242604 |
| ECLASS-9.0 | 27242604 |
| ECLASS-9.1 | 27242604 |
| ECLASS-10.0.1 | 27242604 |
| ECLASS-10.1 | 27242604 |
| ECLASS-11.0 | 27242604 |
| ECLASS-11.1 | 27242604 |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

| | |
|---|---|
| ECLASS-12.0 | 27242604 |
| ECLASS-13.0 | 27242604 |
| ECLASS-14.0 | 27242604 |
| ETIM-5.0 | EC001599 |
| ETIM-6.0 | EC001599 |
| ETIM-7.0 | EC001599 |
| ETIM-8.0 | EC001599 |
| ETIM-9.0 | EC001599 |
| ETIM-10.0 | EC001599 |
| customs tariff number | 85444290 |
| EAN | 4048879048330 |
| Packaging unit | 1 |
| **Electrical data \| Supply** | |
| Norm operating voltage | IEC/EN 61131-2 |
| Operating voltage US DC | 24 V |
| Total current US max. | 4 A |
| Operating voltage UA DC | 24 V |
| Total current UA max. | 4 A |
| Current consumption max. | 30 mA |
| **Electrical data \| Input** | |
| Current carrying capacity max. | 0.5 A |
| filter time | 1 ms |
| Type input | for 3-wire sensors or mechanical switches, PNP |
| **Electrical data \| Output** | |
| Output current per pin max. | 0.5 A |
| Overload resistant | Yes |
| Short-circuit protected | Yes |
| **Industrial Communication** | |
| Parameterization I/O channels | Input, Diagnosis input, Output |
| **Diagnostics** | |
| Actuator warning | per channel via BUS |
| Short circuit diagnosis | Yes |
| Overload diagnosis | Yes |
| Diagnostic | No voltage, Under voltage |
| Diagnostic via BUS | per module and channel |
| Diagnostic via LED | per module |
| LED display | Ethernet connection/data traffic |
| **Device protection \| Electrical** | |
| Degree of protection (EN IEC 60529) | IP67 |
| **Mechanical data \| Mounting data** | |
| Height | 150 mm |
| Width | 30 mm |
| Depth | 34.5 mm |
| Suitable for mounting type | 2-hole screw mounting |
| Cable length | 0.5 m |
| **Environmental characteristics \| Climatic** | |
| Operating temperature min. | 0 °C |
| Operating temperature max. | 55 °C |
| Ambient temperature (storage, transport) | -20 °C … 75 °C |
| **Connection type 3-3** | |
| Connection type 1 | Bus In |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

| | |
|---|---|
| Connection type 2 | Bus Out |
| Connection type 3 | Data |
| Family construction form | M12 |
| No. of poles | 6 |
| Coding | A |
| Gender | male |
| Color contact carrier | black |
| PIN 1 | 24 V DC (UA) |
| PIN 2 | 24 V DC (US) |
| PIN 3 | 0 V |
| PIN 4 | Bus internal |
| PIN 5 | Bus internal |
| PIN 6 | 0 V |
| Family construction form | M12 |
| No. of poles | 6 |
| Coding | A |
| Gender | female |
| Color contact carrier | black |
| PIN 1 | 24 V DC (UA) |
| PIN 2 | 24 V DC (US) |
| PIN 3 | 0 V |
| PIN 4 | Bus internal |
| PIN 5 | Bus internal |
| PIN 6 | 0 V |
| Family construction form | free cable end |
| No. of poles | 20 |
| Color contact carrier | gray |
| PIN 1 | In / Out 1 |
| PIN 2 | In / Out 2 |
| PIN 3 | In / Out 3 |
| PIN 4 | In / Out 4 |
| PIN 5 | In / Out 5 |
| PIN 6 | In / Out 6 |
| PIN 7 | In / Out 7 |
| PIN 8 | In / Out 8 |
| PIN 9 | In / Out 9 |
| PIN 10 | In / Out 10 |
| PIN 11 | In / Out 11 |
| PIN 12 | In / Out 12 |
| PIN 13 | In / Out 13 |
| PIN 14 | In / Out 14 |
| PIN 15 | In / Out 15 |
| PIN 16 | In / Out 16 |
| PIN 17 | 0 V |
| PIN 18 | 0 V |
| PIN 19 | 0 V |
| PIN 20 | 24 V DC Sens |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14