CUBE67 I/O COMPACT MODULE

2 counter, Pre-processing


Art.No.: 56750
Weight: 0,120 kg
Country of origin: CZ
Model designation: Cube67 CNT2 C 4xM12


Compact module
Cube67 CNT2 (C) - 4× M12
Counter module with preprocessing
Connection cables are in the online shop under "Connection Technology".
Housing fully potted.


Link to Product

Illustration




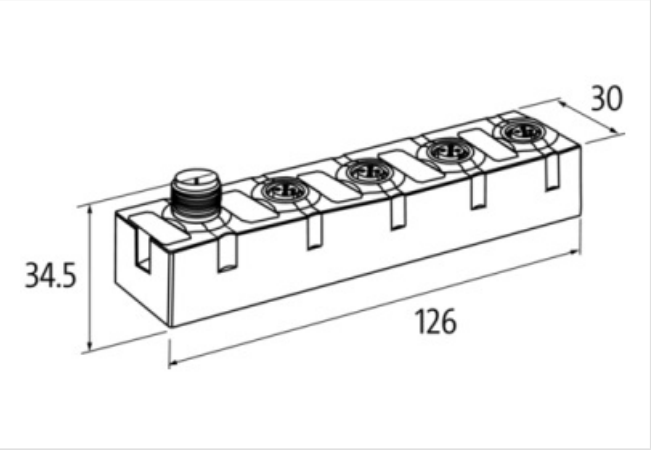

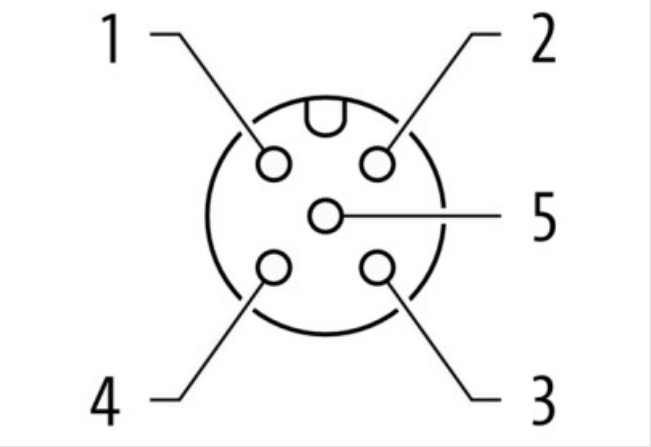

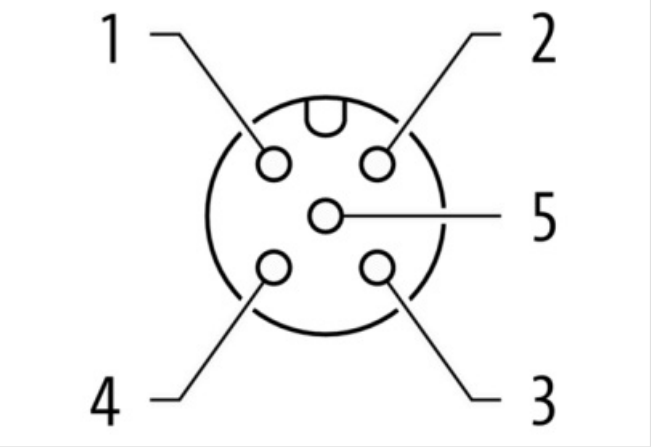

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

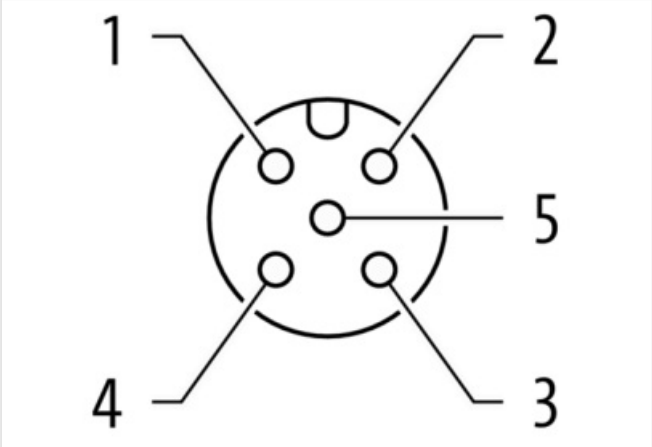

Product may differ from Image

Commercial data	
URL Webshop	https://shop.murrelektronik.com/56750
GTIN	4048879048170
EU-Customs tariff number	85389099
US-Customs tariff number	8538908180
ECLASS-6.0	27242604
ECLASS-6.1	27242604
ECLASS-7.0	27242604
ECLASS-7.1	27242604
ECLASS-8.0	27242604
ECLASS-8.1	27242604
ECLASS-9.0	27242604
ECLASS-9.1	27242604
ECLASS-10.0.1	27242604
ECLASS-10.1	27242604
ECLASS-11.0	27242604
ECLASS-11.1	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604
ECLASS-14.0	27242604
ETIM-5.0	EC001601
ETIM-6.0	EC001601
ETIM-7.0	EC001601
ETIM-8.0	EC001601
ETIM-9.0	EC001601
ETIM-10.0	EC001601
customs tariff number	85389099
EAN	4048879048170
Packaging unit	1
Electrical data	
Counter width	32 bits
Counter frequency max.	300 kHz
Electrical data | Supply	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

Norm operating voltage	IEC/EN 61131-2
Operating voltage US DC	24 V
Total current US max.	4 A
Operating voltage UA DC	24 V
Total current UA max.	4 A
Current consumption max.	50 mA
Electrical data | Input	
Sensor current US per input max.	0.2 A
Short-circuit protected	Yes
Overload resistant	Yes
Input characteristic (IEC 61131-2)	Type 2
filter time	1 ms
Type input	for 3-wire sensors or mechanical switches, PNP
Electrical data | Output	
Output current per pin max.	1.6 A
Overload resistant	Yes
Short-circuit protected	Yes
Lamp load	30 W
Diagnostics	
Actuator warning	per channel via LED and BUS
Short circuit diagnosis	Yes
Overload diagnosis	Yes
Diagnostic	No voltage, Under voltage
Diagnostic via BUS	per module and channel
Diagnostic via LED	per module and channel
LED display	Ethernet connection/data traffic
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP67
Mechanical data | Mounting data	
Height	126 mm
Width	30 mm
Depth	34.5 mm
Suitable for mounting type	2-hole screw mounting
Environmental characteristics | Climatic	
Operating temperature min.	0 °C
Operating temperature max.	55 °C
Ambient temperature (storage, transport)	-20 °C … 75 °C
Connection type 4-4	
Connection type 1	1
Connection type 2	2
Connection type 3	3
Connection type 4	Bus In
Family construction form	M12
No. of poles	5
Coding	A
Gender	female
Color contact carrier	black
PIN 1	24 V DC (US)
PIN 2	Up / Down 0
PIN 3	0 V
PIN 4	Counter In 0

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

PIN 5	n.c.
Family construction form	M12
No. of poles	5
Coding	A
Gender	female
Color contact carrier	black
PIN 1	24 V DC (US)
PIN 2	Gate 1
PIN 3	0 V
PIN 4	DO 1
PIN 5	n.c.
Family construction form	M12
No. of poles	5
Coding	A
Gender	female
Color contact carrier	black
PIN 1	24 V DC (US)
PIN 2	Up / Down 1
PIN 3	0 V
PIN 4	Counter In 1
PIN 5	n.c.
Family construction form	M12
No. of poles	6
Coding	A
Gender	male
Color contact carrier	black
PIN 1	24 V DC (UA)
PIN 2	24 V DC (US)
PIN 3	0 V
PIN 4	Bus internal
PIN 5	Bus internal
PIN 6	0 V

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14