MVK+ MPNIO DIO8 DIO8 PUSH PULL

MVK ProfiNet Compact module, metal


Art.No.: 55283
Weight: 0,975 kg
Country of origin: DE
Model designation: MVK+ MPNIO DIO8 DIO8 Push Pull


Digital inputs/outputs
DIO8 DIO8
Ethernet 10/100 Mbit/s; Push Pull RJ45 Data connector
Push Pull Power connector, max. 12 A
M12, 5-pole, A-coded
Connection cables are in the online shop under "Connection Technology".
Housing fully potted.

Link to Product

Illustration



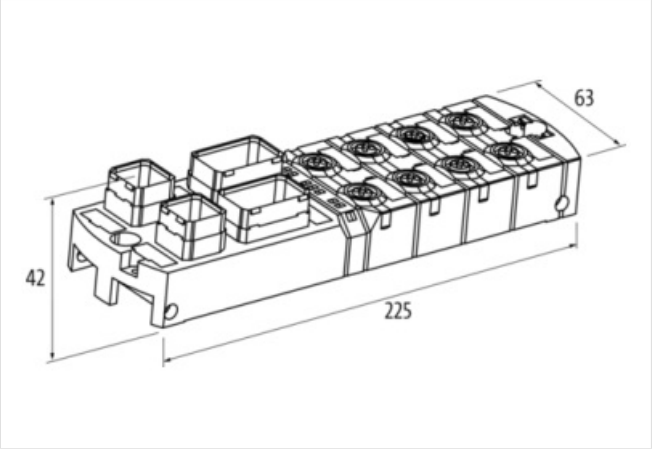

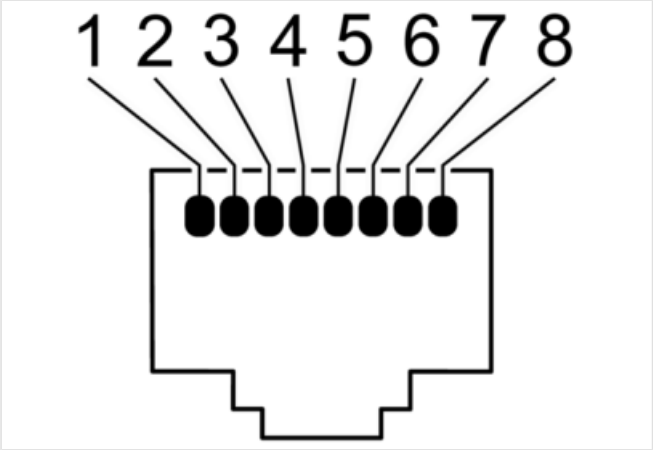

Product may differ from Image

Commercial data

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

URL Webshop	https://shop.murrelektronik.com/55283
GTIN	4048879051682
EU-Customs tariff number	85389099
US-Customs tariff number	8538908180
ECLASS-6.0	27242604
ECLASS-6.1	27242604
ECLASS-7.0	27242604
ECLASS-7.1	27242604
ECLASS-8.0	27242604
ECLASS-8.1	27242604
ECLASS-9.0	27242604
ECLASS-9.1	27242604
ECLASS-10.0.1	27242604
ECLASS-10.1	27242604
ECLASS-11.0	27242604
ECLASS-11.1	27242604
ECLASS-12.0	27242604
ECLASS-13.0	27242604
ECLASS-14.0	27242604
ETIM-5.0	EC001599
ETIM-6.0	EC001599
ETIM-7.0	EC001599
ETIM-8.0	EC001599
ETIM-9.0	EC001599
ETIM-10.0	EC001599
customs tariff number	85389099
EAN	4048879051682
Packaging unit	1
Electrical data | Supply	
Norm operating voltage	IEC/EN 61131-2
Operating voltage US DC	24 V
Total current US max.	12 A
Operating voltage UA DC	24 V
Total current UA max.	12 A
Electrical data | Input	
Sensor current US per input max.	0.2 A
Short-circuit protected	Yes
Overload resistant	Yes
Type input	for 3-wire sensors or mechanical switches, PNP
Electrical data | Output	
Output current per pin max.	1.6 A
Overload resistant	Yes
Short-circuit protected	Yes
Lamp load	10 W
Industrial communication | Bus data	
Supported protocol	PROFINET
Industrial communication | PROFINET	
Conformance Class	B
addressing	DCP
Specification	V2.2
MRP client	Yes
Diagnostics	

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

Actuator warning	per channel via LED and BUS
Short circuit diagnosis	Yes
Overload diagnosis	Yes
Cable break	per port
Diagnostic	No voltage, Under voltage
Diagnostic via BUS	per module and channel
Diagnostic via LED	per module and channel
LED display	Ethernet connection/data traffic
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP67
Mechanical data | Mounting data	
Height	39 mm
Width	63 mm
Depth	225 mm
Suitable for mounting type	2-hole screw mounting
Environmental characteristics | Climatic	
Operating temperature min.	0 °C
Operating temperature max.	55 °C
Ambient temperature (storage, transport)	-20 °C … 70 °C
Connection type 3-3	
Connection type 1	4-7
Connection type 2	Port1, Port2
Connection type 3	Power In, Power Out
Family construction form	M12
No. of poles	5
Coding	A
Gender	female
Color contact carrier	black
PIN 1	24 V DC (US)
PIN 2	DI / DO / Diag
PIN 3	0 V (US)
PIN 4	DI / DO
PIN 5	PE
Family construction form	RJ45
No. of poles	8
Gender	female
Color contact carrier	black
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.
Family construction form	Push Pull
No. of poles	5
Gender	male
Color contact carrier	green
PIN 1	24 V DC (US)
PIN 2	0 V (US)
PIN 3	24 V DC (UA)

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

PIN 4	0 V (UA)
PIN 5	PE

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14