Xelity 8TX Unmanaged Switch 8 Port 100Mbit


Art.No.: 58812
Weight: 0,133 kg
Country of origin: DE
Model designation: Xelity 8TX


8 port unmanaged switch
Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration



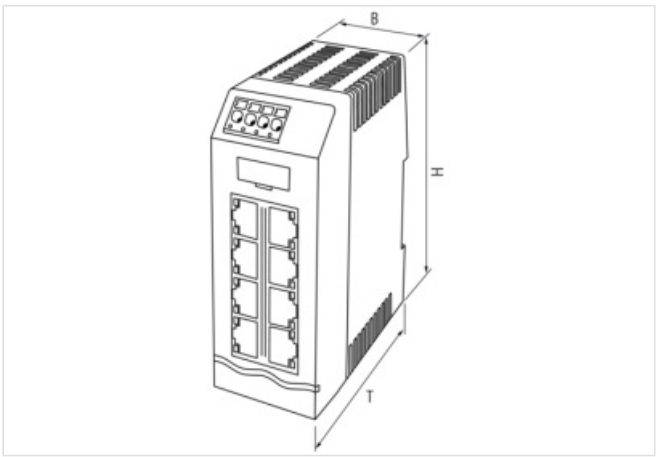

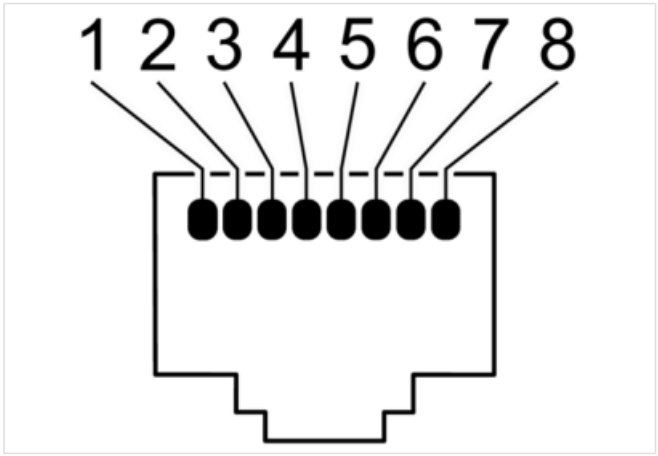

Product may differ from Image

Commercial data

URL Webshop	https://shop.murrelektronik.com/58812
GTIN	4048879798808
EU-Customs tariff number	85176200
US-Customs tariff number	8517620090
ECLASS-6.0	19170106
ECLASS-6.1	19170106

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15

ECLASS-7.0	19170106
ECLASS-7.1	19170106
ECLASS-8.0	19170106
ECLASS-8.1	19170106
ECLASS-9.0	19170106
ECLASS-9.1	19170106
ECLASS-10.0.1	19170402
ECLASS-10.1	19170402
ECLASS-11.0	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ECLASS-13.0	19170402
ECLASS-14.0	19170402
ETIM-5.0	EC000734
ETIM-6.0	EC000734
ETIM-7.0	EC000734
ETIM-8.0	EC000734
ETIM-9.0	EC000734
ETIM-10.0	EC000734
customs tariff number	85176200
EAN	4048879798808
Packaging unit	1
Electrical data | Supply	
Operating voltage DC min.	9.5 V
Operating voltage DC max.	31.5 V
Current consumption max.	50 mA
Power consumption max.	1.2 W
Industrial Communication	
Data transmission rate max.	100 Mbit/s
Industrial communication | Ethernet functionality	
VLAN unmanaged (IEEE 802.1Q)	Yes
Switch type	unmanaged
duplex	Full duplex
Auto-negotiation	Yes
Auto-crossover	Yes
Diagnostics	
Alarm contact	No
Diagnostic	No voltage
LED display	Ethernet connection/data traffic
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP20
Invers-polarity protection	Yes
Over voltage protection	Yes
Mechanical data | Material data	
housing	Plastic
Color housing	black
Mechanical data | Mounting data	
Height	105 mm
Width	41.6 mm
Depth	85.1 mm
Mounting method	geschnappt

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15

Suitable for mounting type	Mounting rail TH35, (EN 60715)
Environmental characteristics | Climatic	
Ambient temperature (operation)	-40 °C … 70 °C
Ambient temperature (storage, transport)	-40 °C … 85 °C
Connection type 2-2	
Connection type 1	8
Family construction form	RJ45
No. of poles	8
Gender	female
Color contact carrier	black
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.
Family construction form	terminal
No. of poles	4
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	24 V DC (UB 1)
PIN 2	0 V
PIN 3	FE
PIN 4	n.c.

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15