**M12 female 0° A-cod. with cable**


PUR 8x0.25 gy UL/CSA+drag ch. 15m


Art.No.: 7000-17041-2921500
Weight: 0,735 kg
Country of origin: CZ
Model designation: MSBL0-08D292_15.0


Female straight
M12, 8-pole
Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request
with cable sleeves
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.
Further cable lengths on request.


## Link to Product

### Illustration

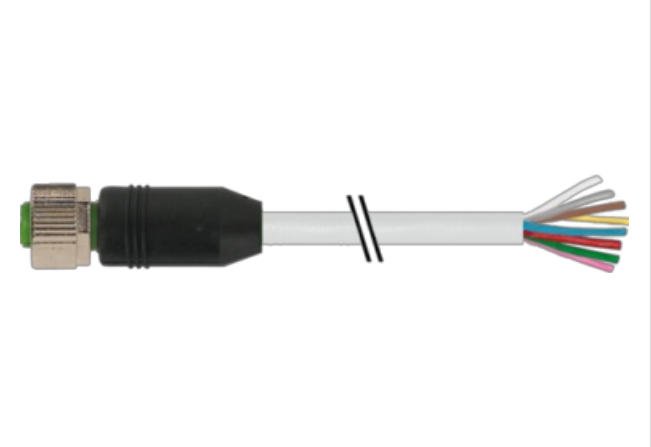


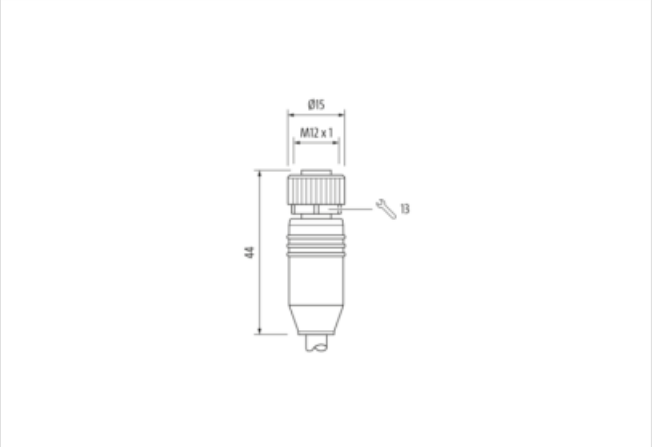


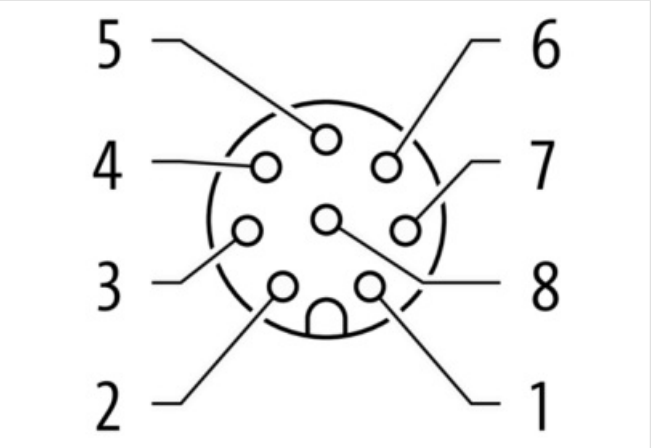
The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

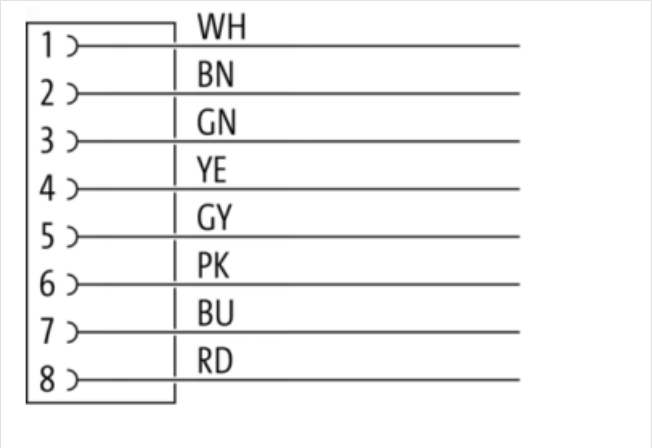

Product may differ from Image
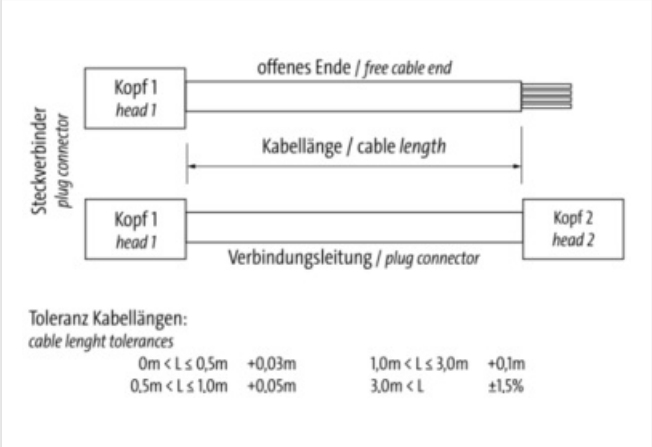
| | |
|---|---|
| Cable length | 15,00 m |
| **Side 1-1** | |
| Family construction form | M12 |
| No. of poles | 8 |
| Coding | A |
| Gender | female |
| Mounting method | inserted, screwed |
| Threaded hole | M12 x 1 |
| Tightening torque | 0.6 Nm |
| Width across flats | SW13 |
| Cable outlet | straight |
| Material | PUR |
| Material contact | Copper alloy |
| Coating contact | gold plated |
| Degree of protection (EN IEC 60529) | IP67, IP66K, IP65 |
| **Side 2-2** | |
| Family construction form | free cable end |
| Stripping length (jacket) | 60 mm |
| **Commercial data** | |
| URL Webshop | https://shop.murrelektronik.com/7000-17041-2921500 |
| EU-Customs tariff number | 85444290 |
| US-Customs tariff number | 8544429090 |
| ETIM-9.0 | EC001855 |
| ETIM-10.0 | EC001855 |
| customs tariff number | 85444290 |
| EAN | 4048879196376 |
| Packaging unit | 1 |
| **Electrical data \| Supply** | |
| Operating voltage AC max. | 30 V |
| Operating voltage DC max. | 30 V |
| Current operating per contact max. | 2 A |
| **Diagnostics** | |

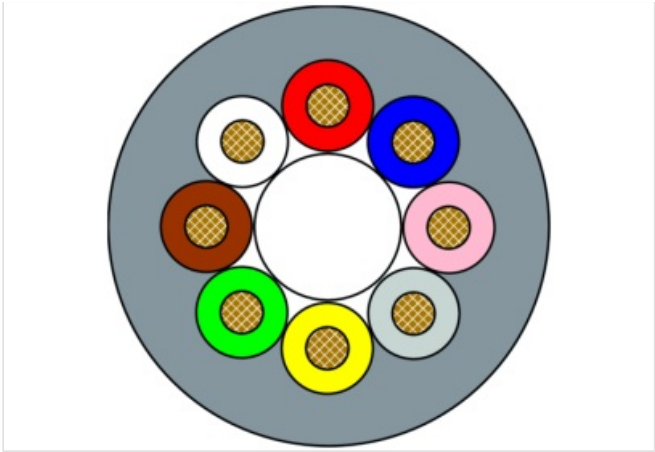The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

| | |
|---|---|
| Status indication LED | No |
| **Installation \| Connection** | |
| Mounting set | M12 x 1 |
| **Device protection \| Electrical** | |
| Degree of protection (EN IEC 60529) | IP67, IP66K, IP65 |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree | 3 |
| Rated surge voltage | 0.8 kV |
| Material group (IEC 60664-1) | I |
| **Mechanical data** | |
| Contour for corrugated hose | without |
| **Mechanical data \| Material data** | |
| Color contact carrier | green |
| Screw connection | Zinc die-casting |
| Coating of fitting | nickel plated |
| **Mechanical data \| Mounting data** | |
| Mounting method | inserted, screwed |
| **Environmental characteristics \| Climatic** | |
| Operating temperature min. | -30 °C |
| Operating temperature max. | 85 °C |
| Additional condition temperature range | depending on cable quality |
| **Important installation notes** | |
| Note on bending radius | **Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
| Note on strain relief | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. |
| **Conformity** | |
| Product standard | EN IEC 61076-2-101 (M12) |
| **Installation \| Cable-1** | |
| Cable identification | 292 |
| Cable Type | 3 |
| Cable weigth | 48 g/m |
| UL AWM Style | 20549 / 10493 |
| Stranding | 1 × 8 wires around core filler twisted |
| Filler | Yes |
| Wire arrangement | BN, WH, RD, BU, PK, GY, YE, GN |
| Material wire insulation | PP |
| Amount wires | 8 |
| Outer diameter insulation | 1.2 mm ± 0.05 mm |
| Conductor crosssection (wire) | 0.25 mm² |
| Material conductor wire | Stranded copper wire, bare |
| Core construction (wire) | 32 × 0.1 mm |
| Ingredient freeness wire insulation | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Material jacket | PUR |
| Outer-diameter (jacket) | 5.8 mm ± 5 % |
| Jacket Color | gray / RAL 7040 |
| Freedom from ingredients (jacket) | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Material property (jacket) | abrasion-resistant, low adhesion, good machinability, matte |
| Conductor resistance (wire) | 79 Ω/km @ 20 °C |
| Nominal voltage max. | 300 V |
| Withstand voltage (wire - wire) | 2.5 kV @ 60 s |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14

| | |
|---|---|
| Withstand voltage (wire - jacket) | 2.5 kV @ 60 s |
| Current load capacity max. (wire) | 3 A |
| Current load capacity (standard) | to DIN VDE 0298-4 |
| Operating temperature (static) | -40 °C … 80 °C / 90 °C @ 10000 h Operation |
| Operating temperature (dynamic) | -25 °C … 80 °C / 90 °C @ 10000 h Operation |
| Operating temperature (drag chain) | -25 °C … 80 °C / 90 °C @ 10000 h Operation |
| Flame resistance | UL 1581 § 1090, CSA FT2, IEC 60332-2-2 |
| Oil resistance | IEC 60811-404 |
| Chemical resistance | good |
| Other resistances | good resistance to gasoline, resistant to hydrolysis, resistant to microbes |
| Notes | application-related testing |
| Bending radius (fixed) | 5 × Outer diameter |
| Bending radius (dynamic) | 10 × Outer diameter |
| No. of bending cycles (C-track) | 10 Mio. @ 25 °C |
| Traversing distance (C-track) | 10 m @ 25 °C \| horizontal |
| Travel speed (C-track) | 3 m/s @ 25 °C |
| Acceleration (C-track) | 10 m/s² @ 25 °C |
| No. of torsion cycles | 2 Mio. |
| Torsion stress | ± 180 °/m |
| Torsion speed | 35 cycles/min |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-14