## Xenterra 5TX unmanaged Switch 5 Port 1000Mbit wall mounting


Art.No.: 58907
Weight: 0,210 kg
Country of origin: DE
Model designation: Xenterra 5TX GE WM


5 Port Unamanged IP20 Gigabit Switch
Wall mounting

Link to Product

### Illustration

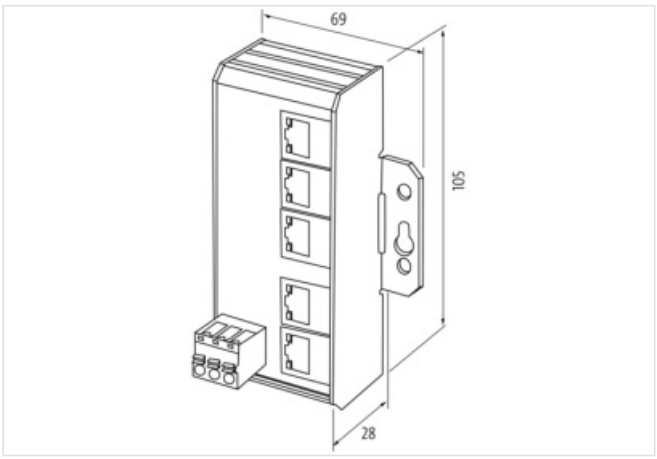


Product may differ from Image
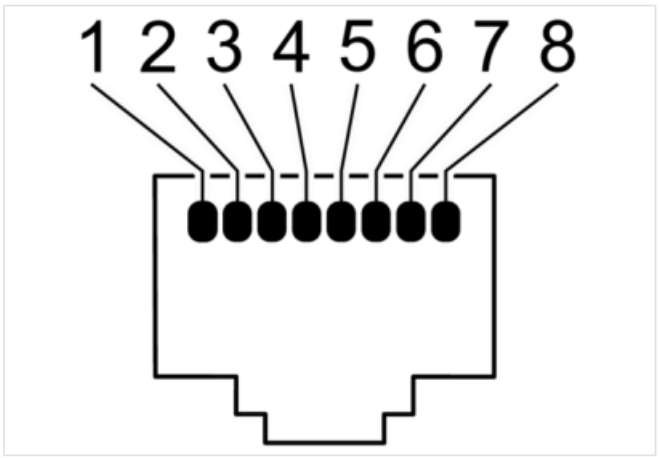
### Commercial data

| | |
|---|---|
| URL Webshop | https://shop.murrelektronik.com/58907 |
| GTIN | 4048879873536 |
| EU-Customs tariff number | 85176200 |
| US-Customs tariff number | 8517620090 |
| ECLASS-6.1 | 19170106 |
| ECLASS-7.0 | 19170106 |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15

| | |
|---|---|
| ECLASS-7.1 | 19170106 |
| ECLASS-8.0 | 19170106 |
| ECLASS-8.1 | 19170106 |
| ECLASS-9.0 | 19170106 |
| ECLASS-9.1 | 19170106 |
| ECLASS-10.0.1 | 19170402 |
| ECLASS-10.1 | 19170402 |
| ECLASS-11.0 | 19170402 |
| ECLASS-11.1 | 19170402 |
| ECLASS-12.0 | 19170402 |
| ECLASS-13.0 | 19170402 |
| ECLASS-14.0 | 19170402 |
| ETIM-9.0 | EC000734 |
| ETIM-10.0 | EC000734 |
| customs tariff number | 85176200 |
| EAN | 4048879873536 |
| Packaging unit | 1 |
| **Electrical data \| Supply** | |
| Operating voltage AC min. | 8 V |
| Operating voltage AC max. | 28 V |
| Operating voltage DC min. | 9 V |
| Operating voltage DC max. | 36 V |
| **Industrial Communication** | |
| Data transmission rate max. | 1000 Mbit/s |
| **Industrial communication \| Ethernet functionality** | |
| VLAN unmanaged (IEEE 802.1Q) | Yes |
| Switch type | unmanaged |
| duplex | Full duplex |
| Auto-negotiation | Yes |
| Auto-crossover | Yes |
| **Diagnostics** | |
| Alarm contact | No |
| Diagnostic | No voltage |
| LED display | Ethernet connection/data traffic |
| **Device protection \| Electrical** | |
| Degree of protection (EN IEC 60529) | IP20 |
| **Mechanical data \| Material data** | |
| housing | Metal |
| Color housing | black |
| **Mechanical data \| Mounting data** | |
| Height | 105 mm |
| Width | 69 mm |
| Depth | 28 mm |
| Mounting method | screwed |
| Suitable for mounting type | Keyhole mounting |
| **Environmental characteristics \| Climatic** | |
| Ambient temperature (storage, transport) | -40 °C … 85 °C |
| **Connection type 1-1** | |
| Connection type 1 | 5 |
| Family construction form | RJ45 |
| No. of poles | 8 |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15

| | |
|---|---|
| Gender | female |
| Color contact carrier | black |
| PIN 1 | TD + |
| PIN 2 | TD - |
| PIN 3 | RD + |
| PIN 4 | n.c. |
| PIN 5 | n.c. |
| PIN 6 | RD - |
| PIN 7 | n.c. |
| PIN 8 | n.c. |

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15