6 Port unmanaged Gigabit Switch 4 PoE 1 SFP Ports IP20 metal 48V


Art.No.: 58191
Weight: 0,350 kg
Country of origin: TW
Model designation: TREE 6TX 4PoE 1SFP GE 48V


6 Port Unmanaged IP20 PoE Gigabit Switch
48 V power supply
SFP contact holder

Link to Product

Illustration



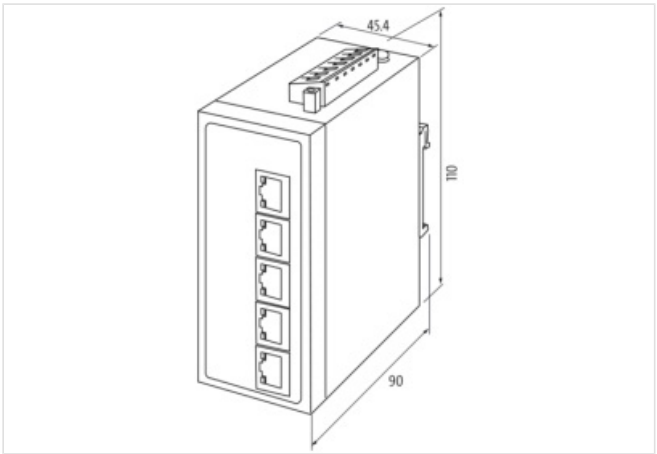

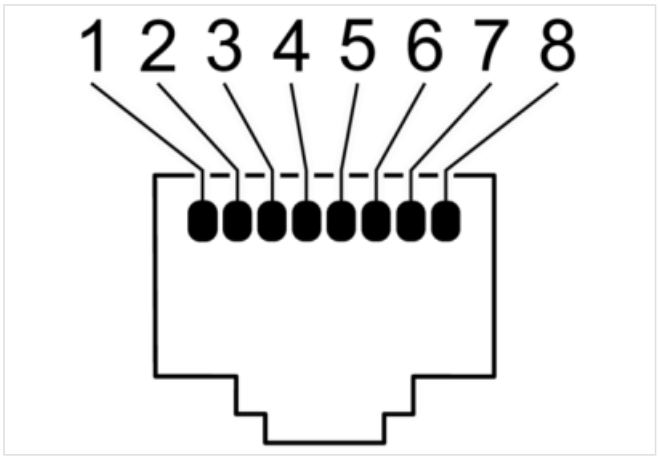

Product may differ from Image

Commercial data

URL Webshop	https://shop.murrelektronik.com/58191
GTIN	4048879843683
EU-Customs tariff number	85176200
US-Customs tariff number	8517620090
ECLASS-6.1	19170106

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15

ECLASS-7.0	19170106
ECLASS-7.1	19170106
ECLASS-8.0	19170106
ECLASS-8.1	19170106
ECLASS-9.0	19170106
ECLASS-9.1	19170106
ECLASS-10.0.1	19170402
ECLASS-10.1	19170402
ECLASS-11.0	19170402
ECLASS-11.1	19170402
ECLASS-12.0	19170402
ECLASS-13.0	19170402
ECLASS-14.0	19170402
ETIM-9.0	EC000734
ETIM-10.0	EC000734
customs tariff number	85176200
EAN	4048879843683
Packaging unit	1
Electrical data | Supply	
Power consumption max.	7.2 W
PoE voltage amplifier	Yes
Industrial Communication	
Data transmission rate max.	1000 Mbit/s
Industrial communication | Ethernet functionality	
VLAN unmanaged (IEEE 802.1Q)	Yes
Switch type	unmanaged
duplex	Full duplex
Auto-negotiation	Yes
Auto-crossover	Yes
Diagnostics	
Alarm contact	Yes
Diagnostic	No voltage
LED display	Ethernet connection/data traffic
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP20
Mechanical data | Material data	
housing	Metal
Color housing	black
Mechanical data | Mounting data	
Height	110 mm
Width	45.4 mm
Depth	89.6 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Environmental characteristics | Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	70 °C
Ambient temperature (storage, transport)	-40 °C … 85 °C
Connection type 3-3	
Connection type 1	1

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15

Connection type 2	6
Connection type 3	X1
Family construction form	POF SC-RJ
No. of poles	2
Gender	female
Color contact carrier	black
PIN 1	RD
PIN 2	TD
Family construction form	RJ45
No. of poles	8
Gender	female
Color contact carrier	black
PIN 1	TD +
PIN 2	TD -
PIN 3	RD +
PIN 4	n.c.
PIN 5	n.c.
PIN 6	RD -
PIN 7	n.c.
PIN 8	n.c.
Family construction form	terminal
No. of poles	7
Gender	male
Color contact carrier	green
Connection	Plug-in terminals RK
PIN 1	V 2 +
PIN 2	V 2 -
PIN 3	Relay (NO)
PIN 4	Relay (NO)
PIN 5	V 1 +
PIN 6	V 1 -
PIN 7	FE

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15