MICO67 electronic circuit protection, 4-channels, 4A

IN: 24 V DC OUT: 24 V DC / 4 A CL2 / Expandable


Art.No.: 9000-41014-0400068
Weight: 0,154 kg
Country of origin: DE
Model designation: Mico67-4.4-CL2-A

Mico67 is the perfect electronic overcurrent protection solution for decentralized installations in IP67 protection class. MICO67 is designed for reliable protection of actuators, sensors, DC motors, lighting, fieldbus modules, and also serves as circuit protection. These modules find application in various industries such as mechanical engineering, intralogistics, automotive, packaging, vision systems, and more.

Link to Product

Illustration



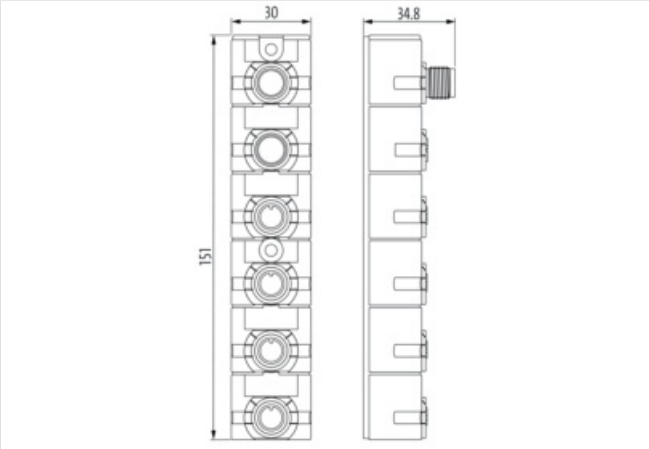

Product may differ from Image

Commercial data

URL Webshop	https://shop.murrelektronik.com/9000-41014-0400068
GTIN	4065909074817
EU-Customs tariff number	85363010
US-Customs tariff number	8536308000
ECLASS-6.0	27371802
ECLASS-6.1	27371802
ECLASS-7.0	27371802
ECLASS-8.0	27371802
ECLASS-9.0	27371802
ECLASS-10.1	27371802
ECLASS-11.1	27371802
ECLASS-12.0	27371802
ETIM-7.0	EC001440
ETIM-8.0	EC001440
ETIM-9.0	EC001440
ETIM-10.0	EC001440
customs tariff number	85363010
EAN	4065909074817

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-13

Packaging unit	1
Electrical data | Supply	
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Total current max.	16 A
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP67, IP65
Device protection | Mechanical	
Shock resistance (EN IEC 60068-2-27)	50 g 11 ms
Mechanical data | Mounting data	
Height	34.8 mm
Width	30 mm
Depth	151 mm
Environmental characteristics | Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	45 °C
Ambient temperature (storage, transport)	-25 °C … 70 °C
Relative humidity (operation)	95 %
Additional condition relative humidity	no dew formation
Conformity	
Product standard	EN IEC 61000-6-2, EN IEC 61000-6-3
Connection types	
Connection type 1	Power In
Connection type 2	Power Out
Connection type 3	X1-X4

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-13