M12 male 0° A-cod. IDC

4-pol., 0.25 - 0.5mm², 4 - 5,1mm


Art.No.: 7B00-12481-0000000
Weight: 0,020 kg
Country of origin: DE
Model designation: MSAL0-AC-T-IDC


Items in the 7BXX- series are packed in cartons according to the specified packaging unit without individual foil packaging.
Male straight
M12, 4-pole
IDC terminals
Connection cross section: 0.25...0.5 mm²
Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request
The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration



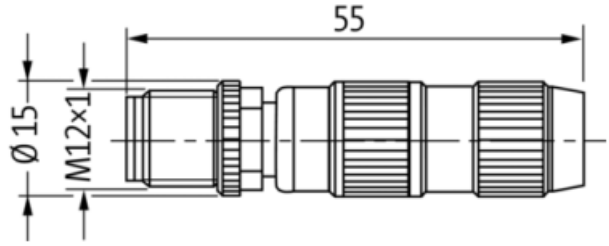

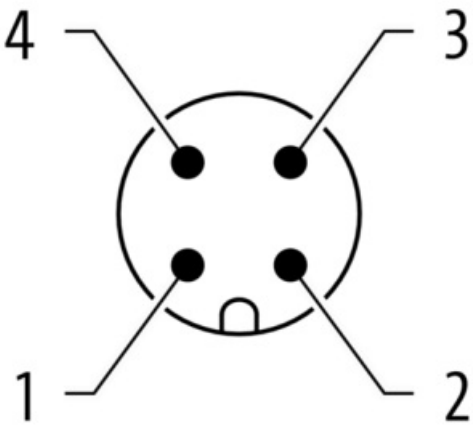

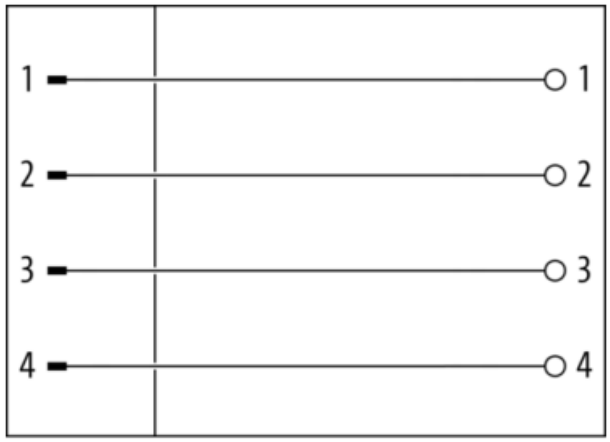

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15

Leitungslänge in m / *cable length in m*	VPE / *PU*
0,0 (kein Kabel / *no cable*)	50
0,1 - 3,0	50
3,01 - 7,5	20
7,51 - 15,0	10
15,01 - 30,0	5
30,01 - ...	tbd

Product may differ from Image

Side 1-1	
Family construction form	M12
Degree of protection (EN IEC 60529)	IP67
Commercial data	
URL Webshop	https://shop.murrelektronik.com/7B00-12481-0000000
GTIN	4065909189504
EU-Customs tariff number	85366990
ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-7.1	27440102
ECLASS-8.0	27440102
ECLASS-8.1	27440102
ECLASS-9.0	27440116
ECLASS-9.1	27440106
ECLASS-10.0.1	27440106
ECLASS-10.1	27440102
ECLASS-11.0	27440106
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440106
ECLASS-14.0	27440106
ETIM-5.0	EC002635
ETIM-6.0	EC002635
ETIM-7.0	EC002635
ETIM-8.0	EC002635
customs tariff number	85366990
EAN	4065909189504
Packaging unit	50
Electrical data | Supply	
Operating voltage AC max.	32 V
Operating voltage DC max.	32 V
Current operating per contact max.	4 A
Installation	
Single wire diameter min.	0.1 mm
Connection cross section min.	0.25 mm²
Connection cross section max.	0.5 mm²

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15

Installation | Connection	
Tightening torque	0.6 Nm
Wire insulation diameter min.	1.2 mm
Wire insulation diameter max.	1.6 mm
Device protection | Electrical	
Additional condition protection degree	mounted, screwed
Rated surge voltage	0.8 kV
Material group (IEC 60664-1)	III
Mechanical data | Mounting data	
Height	55 mm
Width	15 mm
Depth	15 mm
Mounting method	inserted, screwed, Shaking protection
Clamping range min.	4 mm
Clamping range max.	5.1 mm
Environmental characteristics | Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Important installation notes	
Note on bending radius	**Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-10-15